


PLAN
Scale: 1:25

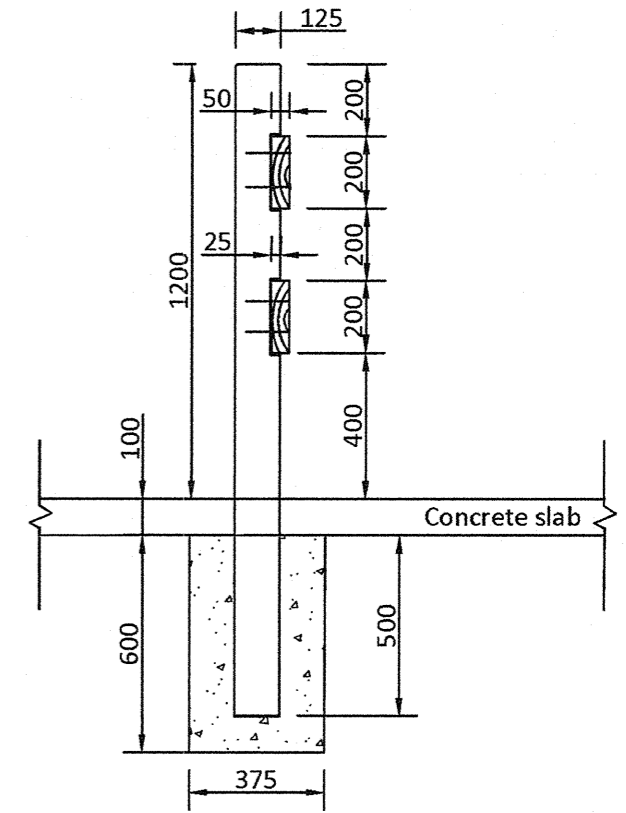

SIDE POST ELEVATION
Scale: 1:20

NOTES:

- All timber to be durability Class 1 hardwood timber, F14, cut free from sapwood.
- Ensure all timber has smooth external surfaces edges and chamfers, free from splinters.
- Post to be set vertical with chamfered top.
- Apply 5mm chamfer to all edges.
- Where coloured finish is required, paint all timber with 1 No. coat of oil based primer and 2 No. coats of approved acrylic exterior paint. Colour to be approved by ICC.
- Where natural finish is required, paint all timber with 1 No. coat of approved clear water repellent following fabrication. Following construction, paint assembly with 1 No. coat of the same.
- Concrete footings are to be no fines concrete, 10mm max. aggregate size and shall be ready mixed or hand mixed in accordance with AS1379-2007. Any concrete slurry to be cleaned from posts.
- Concrete slab to be 100mm thick reinforced, coloured in earth hue ie. CCS 'Paperbark'. ICC to approve.
- This pedestrian entry must only be used for ICC Reserves and approved Parks wherein no formalised and DDA compliant pathways exist, ie. tracks and trails. Refer to SP.87 for the alternate Park Entry detail.

REVISIONS					
AMENDMENT	INITIALS	DATE	AMENDMENT	INITIALS	DATE
F				L	
E				K	
D				J	
C				I	
B				H	
A				G	

IPSWICH CITY COUNCIL
 45 Roderick St
 P.O. Box 191
 Ipswich QLD 4305
 Australia
 Tel (07) 3810 7894
 Tel (07) 3810 7927
 Fax (07) 3810 7950

APPROVED

 CHIEF OPERATING OFFICER (WPR)
 DATE 29-7-13

STANDARD DRAWING
FENCE: NATURAL AREAS/BUSHLAND TWO RAIL PEDESTRIAN ENTRY

PARKS
SP.101
 REV: A DRAWER: 100