



PLAN: POST AND RAIL
SCALE: 1:40

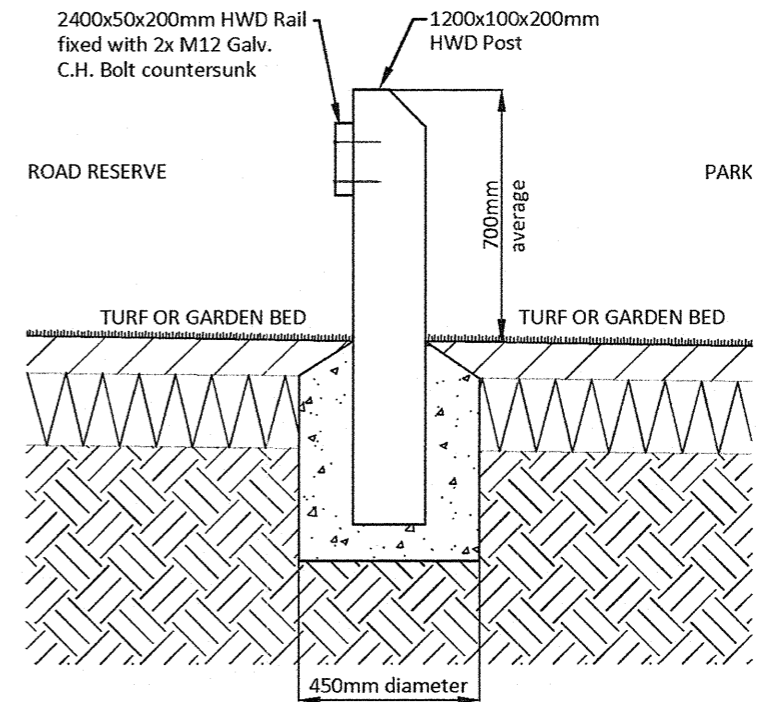

SECTION: POST AND RAIL
SCALE: 1:20

NOTES:

1. Where possible post & rails are to be positioned in garden bed. Alternate position to be approved by ICC.
2. Where rails are retrofitted all surrounding surfaces are to be made to match existing.
3. All timber to be durability Class 1 H.W. timber F14, cut free from sapwood.
4. Concrete footings are to be no fines concrete 10mm max aggregate size and shall be ready mixed or hand mixed in accordance with AS1379-2007
5. Ensure post and rail has smooth surface, free from splinters to all external timber faces, edges and chamfers.
6. Apply 5mm chamfer to all post and rail edges.
7. Where coloured finish is required, paint timber with 1 coat of oil based primer and 2 coats of approved acrylic exterior paint. Colour to be approved by ICC.
8. Where natural finish is required, paint all timber with 1 coat of clear water repellent following fabrication. After construction paint assembly with 1 coat of the same.

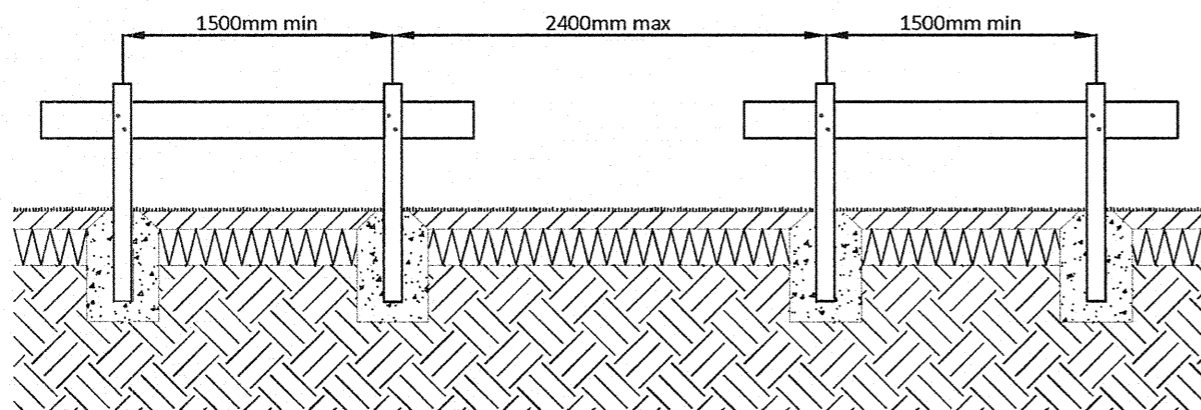

ELEVATION: POST AND RAIL
SCALE: 1:40

REVISIONS					
AMENDMENT	INITIALS	DATE		AMENDMENT	INITIALS DATE
F			L		
E			K		
D			J		
C	Notes Altered		I		
B	Notes Altered		H		
A	ORIGINAL ISSUE		G		

IPSWICH CITY COUNCIL
 45 Roderick St
 P.O. Box 191
 Ipswich QLD 4305
 Australia

Tel (07) 3810 7894
 Tel (07) 3810 7927
 Fax (07) 3810 7950

APPROVED

 CHIEF OPERATING OFFICER (WPR)
 DATE 29-7-13

STANDARD DRAWING
FENCE - TIMBER POST AND RAIL

PARKS
SP.42
 REV: C DRAWER: 100